


# Flush Mount to Wall/Curb New Construction

## FlexGround Standard Detail

Note: Total thickness of system is based on fall height of equipment

Drawing not to scale

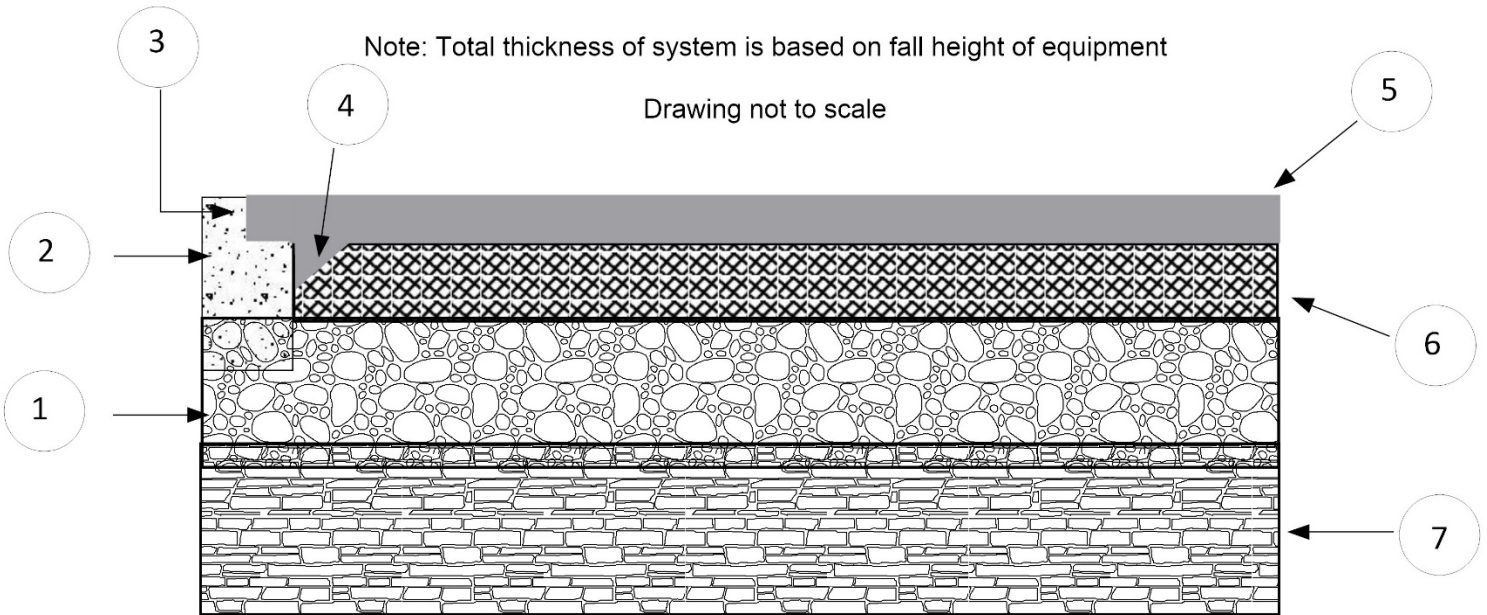

- |   |   |
|---|---|
| 1. 4" of ABC compacted to 95%<br>(Concrete or asphalt acceptable) | 4. 3/4" deep 45° cushion layer turndown<br>filled with EPDM |
| 2. Concrete edge  | 5. 1/2" (12.7 mm) EPDM<br>safety rubber                     |
| 3. Allow 3" overlap of EPDM<br>over concrete edge 1/2" deep       | 6. SBR cushion layer  |
|   | 7. Well prepared sub grade                                  |

**ARIZONA**  
Lic #288687 & 283192  
602.954.0000

**CALIFORNIA**  
Lic #1003439  
916.474.5431

**NEVADA**  
Lic #0076764 & 0077757  
702.303.8701