


Flush Mount to Wall/Curb New Construction

FlexGround UltraFlex Detail

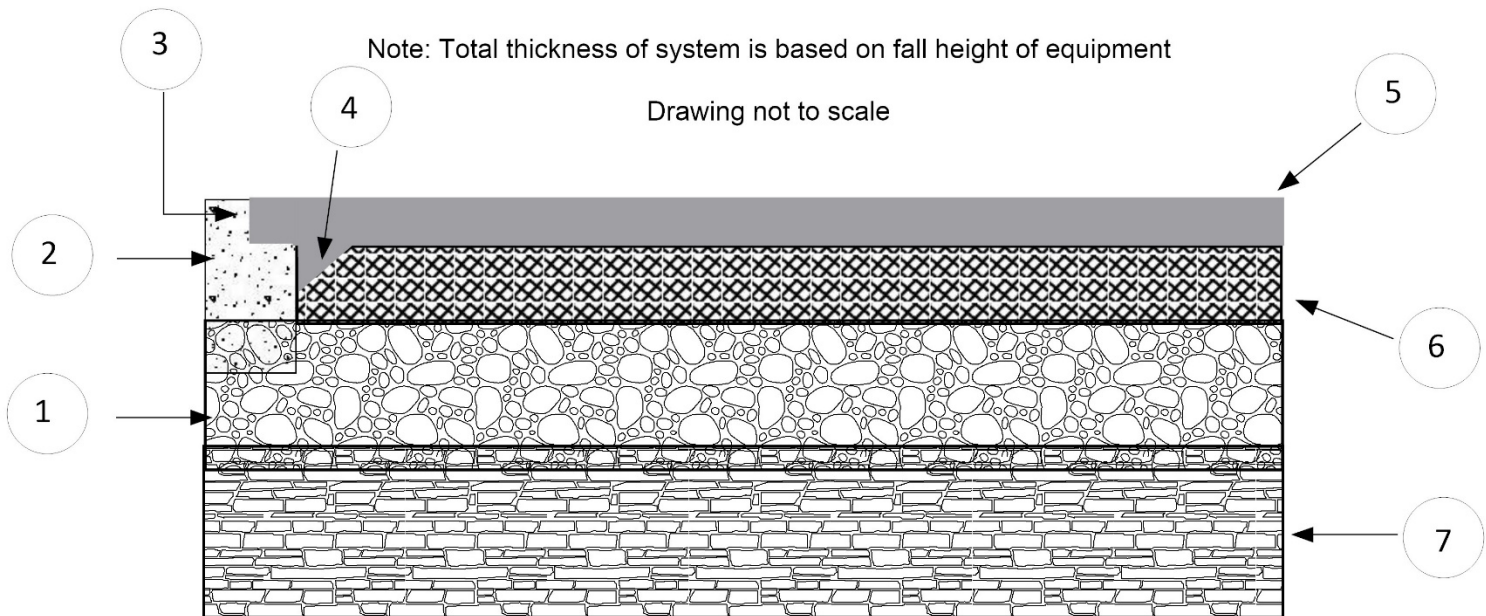

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. 4" of ABC compacted to 95%
(Concrete or asphalt acceptable) 2. Concrete edge 3. Allow 3" overlap of TPV
over concrete edge 1/2" deep | <ol style="list-style-type: none"> 4. 3/4" deep 45° cushion layer turndown
filled with TPV 5. 1/2" (12.7 mm) TPV
safety rubber 6. SBR cushion layer 7. Well prepared sub grade |
|---|--|

ARIZONA
Lic #288687 & 283192
602.954.0000

CALIFORNIA
Lic #1003439
916.474.5431

NEVADA
Lic #0076764 & 0077757
702.303.8701