


Flush Mount to Wall/Curb Existing Playground or New Construction Area

FlexGround EnduraFlex Detail

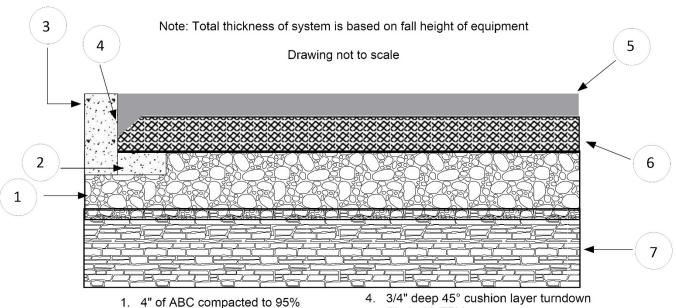

- (Concrete or asphalt acceptable)
- 2. 6" wide by 2" thick concrete
- 3. Concrete Edge

- filled with TPV
- 5. 1/2" (12.7 mm) TPV safety rubber
- 6. SBR cushion layer
- 7. Well prepared sub grade