


Tapered Edge With Keyway FlexGround Detail

Note: Total Thickness Of System Is Based On Fall Height Of Equipment
Drawing Not To Scale

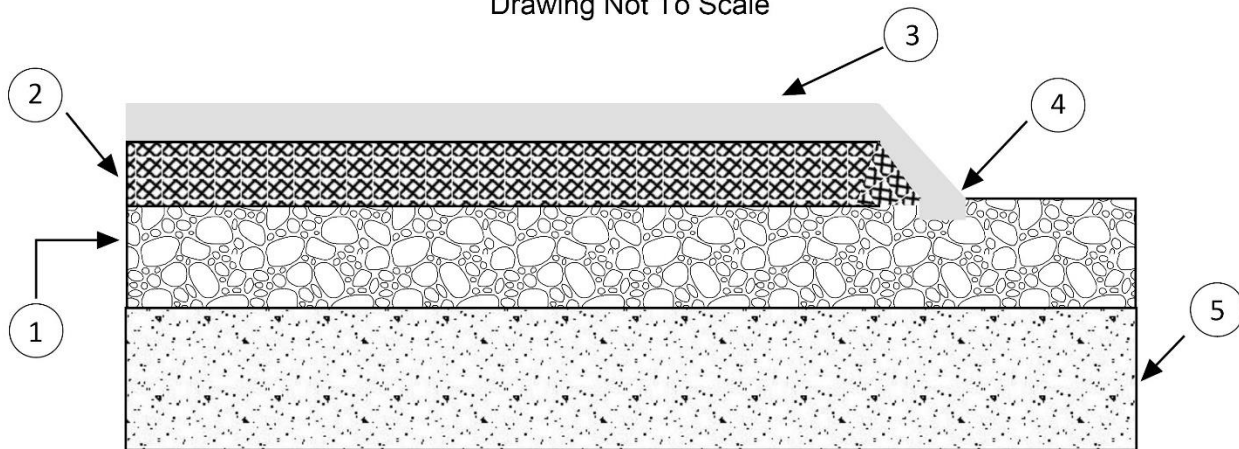

1. 4" of ABC compacted to 95%
(Concrete or asphalt acceptable)
2. SBR cushion layer
3. 1/2" (12.7mm) EPDM safety rubber
4. 1/2" x 1 1/2" keyway outside perimeter
of grade
5. Well prepared sub grade

ARIZONA
Lic #288687 & 283192
602.954.0000

CALIFORNIA
Lic #1003439
916.474.5431

NEVADA
Lic #0076764 & 0077757
702.303.8701