


SECURE LOCK PLAYGROUND TILES

ASTM 1292 FALL HEIGHT REQUIREMENTS

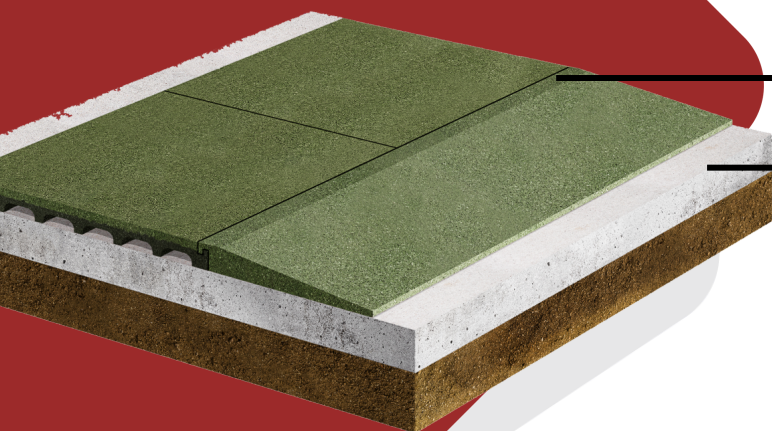

Secure Lock Interlocking Tile

Concrete Sub-base

Critical Play Height of
Equipment

2-1/4"
TILE

Up to 4' CFH

2-3/4"
TILE

Up to 6' CFH

3-1/4"
TILE

Up to 8' CFH

4-1/4"
TILE

Up to 10' CFH

Sub-base: Concrete



Robertson
Recreational Surfaces

rev 09-2020

800-858-0519
www.totturf.com
info@totturf.com